



# BALDA BLOCK

**BALDA****BLOCK**  
MONOBLOC GATES


# MONOBLOC GATES designed by Baldassar

Certified and possibly mechanized, installation in half an hour, the day after already usable



- 1 LESS MANPOWER:** PLACING IN HALF AN HOUR
- 2 EASY:** FITTED PASSAGE FOR ELECTRICAL CABLES (only for double swing gates)
- 3 LESS EXPENSIVE:** NO NEED OF CONCRETE PILLARS
- 4 CUSTOMIZATION:** WIDE RANGE OF INFILL PANELS MODELS
- 5 FEWER ENGAGEMENTS:** INSTALLATION OF A STANDARD PRODUCT DOES NOT NEED PROFESSIONAL INSPECTIONS
- 6 FEWER DAMAGES:** MONOBLOC SYSTEM PREVENTS STRUCTURAL FAILURE AND GUARANTEES ITS AUTOMATIC AND MECHANICAL COMPONENTS FOR LONGER DURABILITY AND REDUCED MAINTENANCE
- 7 QUALITY:** ADAPTED FRAME DEPENDING ON THE SIZE; HOT-DIP GALVANIZED STEEL AND/OR POWDER COATING
- 8 GUARANTEE:** THE PRODUCT IS CERTIFIED WITH QUALITY ASSURANCE ACCORDING TO CE REGULATION
- 9 DURABILITY:** VERY CAREFULLY SELECTION OF THE COMPONENTS
- 10 SERVICE:** EACH BALDABLOCK IS AVAILABLE IN STOCK (subject to prior sale)

## BALDABLOCK SLIDING GATE

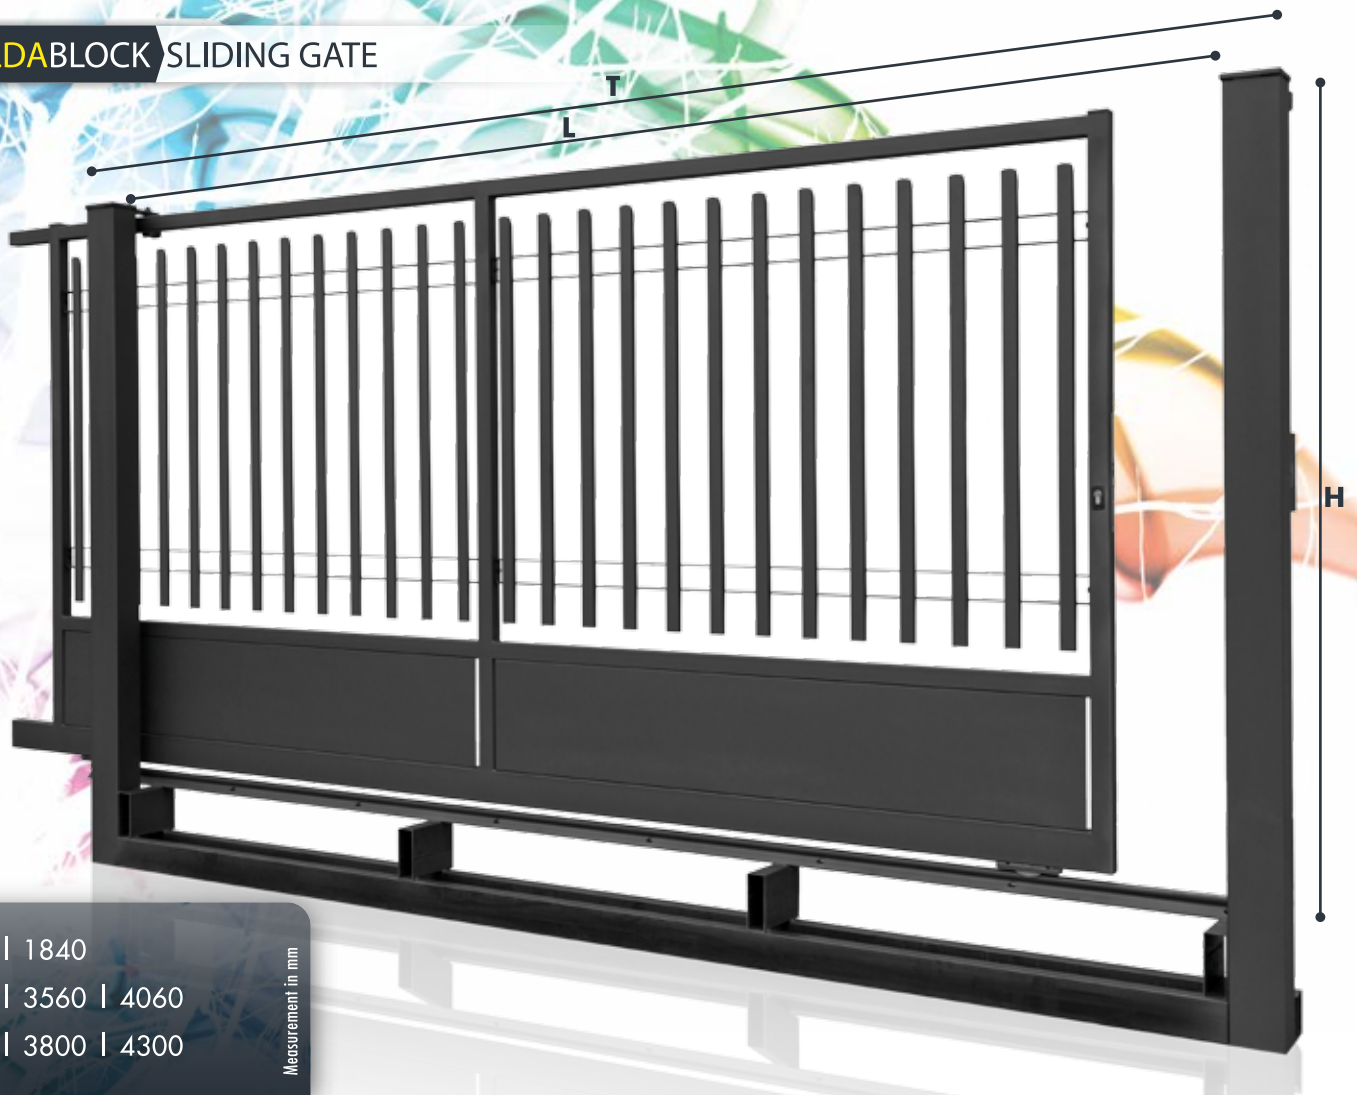

H 1500 | 1840  
L 3160 | 3560 | 4060  
T 3400 | 3800 | 4300

Measurement in mm

Infill panel INFINITY

## BALDABLOCK PEDESTRIAN GATE



H 1500 | 1840  
L 1140  
T 1380

Measurement in mm

Infill panel INFINITY

## BALDABLOCK SWING GATE



H 1500 | 1840  
L 3160 | 3560 | 4060  
T 3400 | 3800 | 4300

Measurement in mm

Infill panel INFINITY

## BALDABLOCK SWING GATE+PEDESTRIAN GATE\*



H 1500 | 1840  
L 3160 | 3560 | 4060  
L² 1140  
T 4660 | 5060 | 5560


Measurement in mm

\*It is available *sliding gate+pedestrian gate* version


Infill panel INFINITY



PANEL **RIBES**

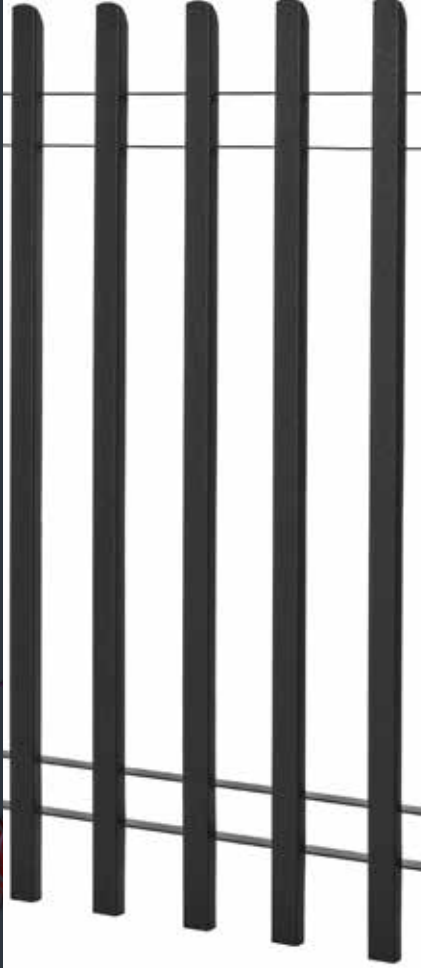

PANEL **INFINITY**

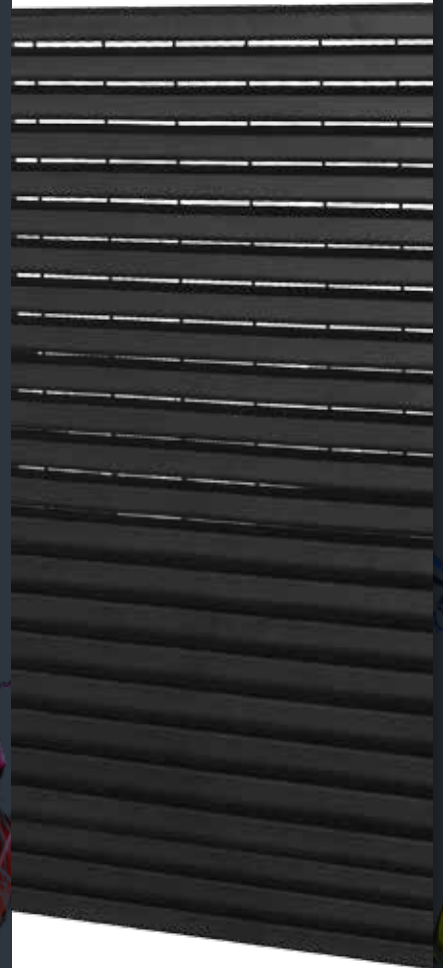

PANEL **HORIZON**


▶ **INFILL PANELS AVAILABLE FOR EVERY MODEL IN EVERY COLOR VARIANT**



PANEL **VEGA**



PANEL **FREE**

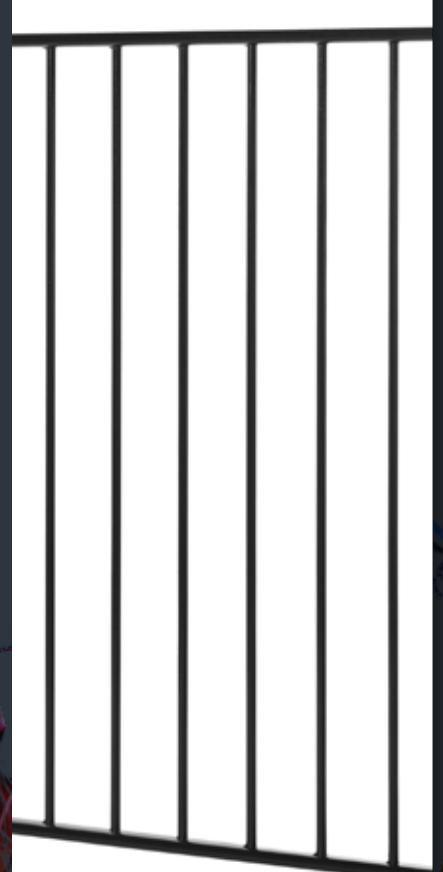


PANEL **OVALIS**




PANEL **CISAR**




PANEL **CONISAR**

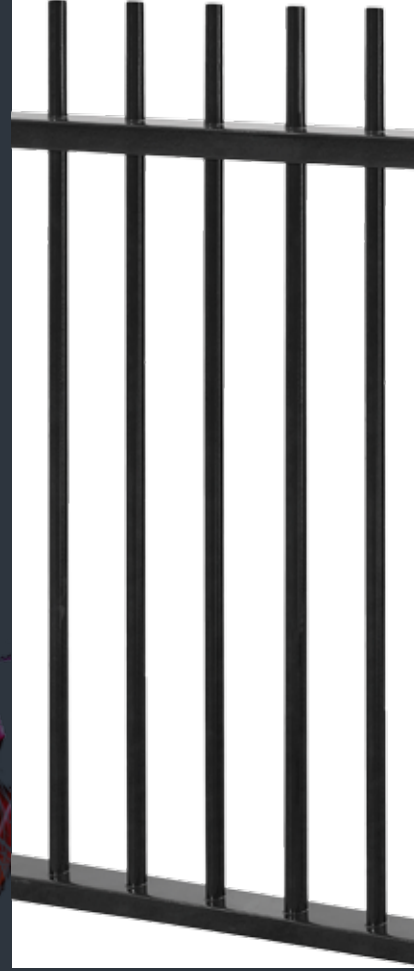

PANEL **REGULAR**

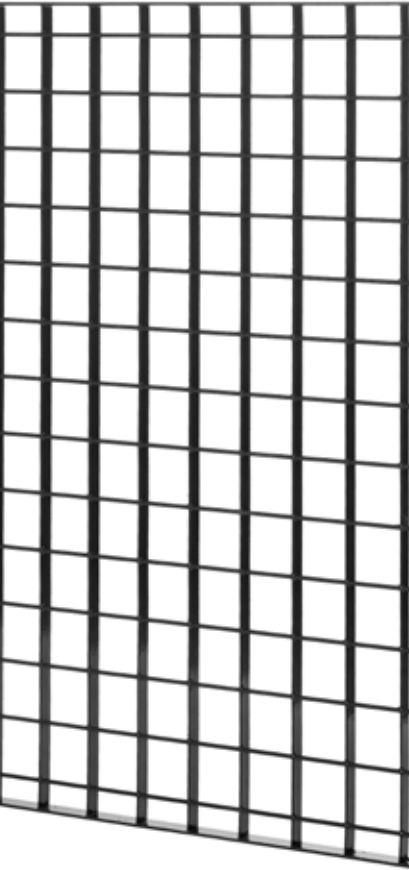

PANEL **QUASAR**

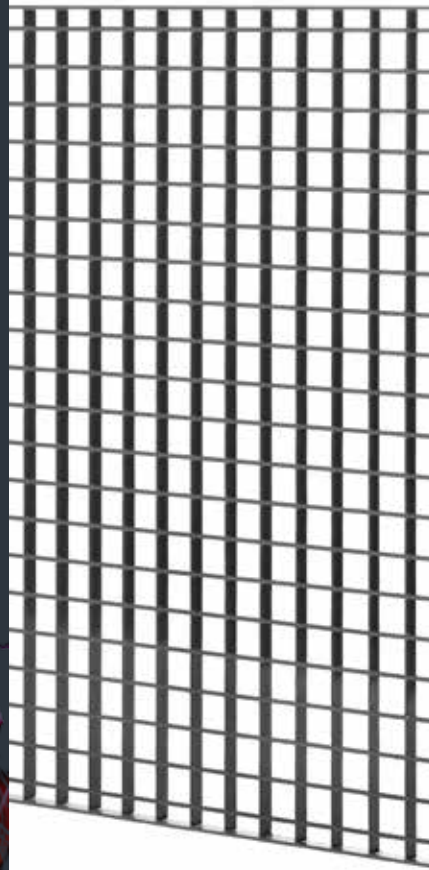


PANEL **QUADRA**




PANEL **MULTISAR**

# ADVICES ON INSTALLATION


## 1) PREPARATION OF EXCAVATION




## 2) INSERTION BALDABLOCK

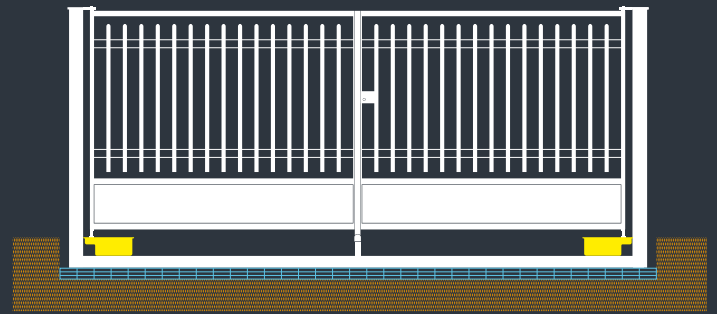




## 3) CENTERING THE BUBBLE




## 4) POURING CEMENT

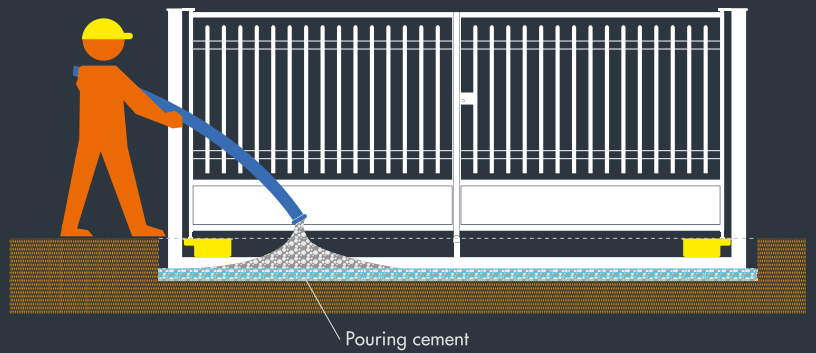

## ACCESSORIES & SAFETY

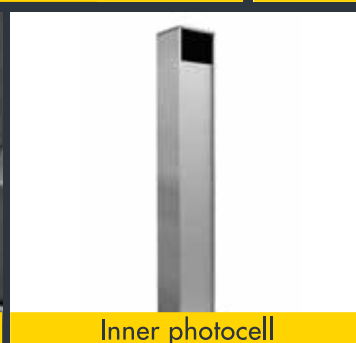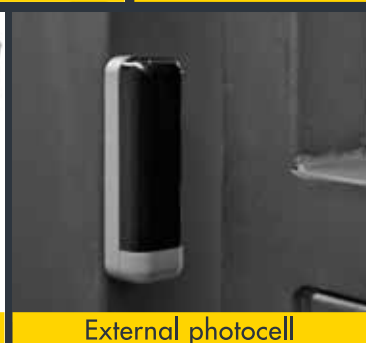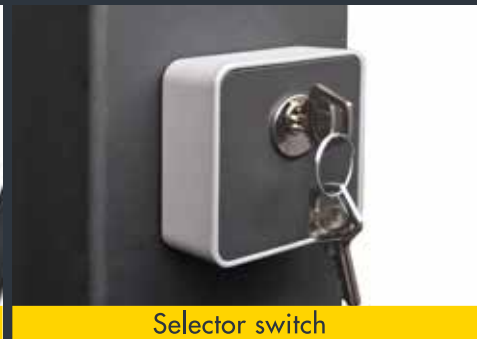

LOCK SYSTEM TO ENSURE SAFETY DURING TRANSPORT. TO BE REMOVED ONLY AFTER COMPLETE INSTALLATION OF BALDABLOCK

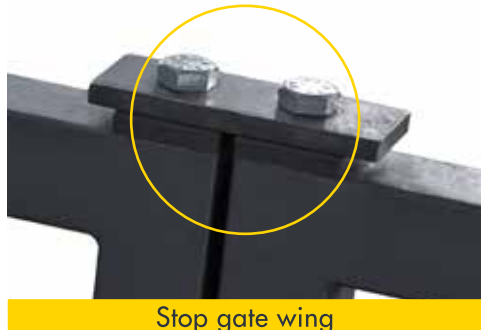

## BALDABLOCK

Quality and experience are the main guidelines on our work of monobloc BALDABLOCK fences and gates. One of the fundamental elements of all our range is the easy installation on site. Thanks to clear aims and analytical view on the market we can create innovative solutions that avoid wasting time and strengths from seller to end-user. It is possible to choose any item to realize customizations of every single piece of the range BALDASSAR. 30 Years experience gives us the opportunity to select always the best raw materials and techniques. Colored finishes offer a product ready to install and suitable to every aesthetic need. Our accuracy provides immediate replies and timely deliveries.

## THE IMPORTANCE OF BRANDING C€

BALDABLOCK fences line is marked C€ according to the security requirements claimed in the European regulation. In this regard the regulation establishes evaluation procedures for industrial products, that are supposed to be marked C€ in order to guarantee the compliance with its essential requirements. The brand C€ means "Conformité Européenne"; products showing it are in compliance with the essential requirements established in matter of security, public health and customer protection, etc.

 COLOURS (STANDARD: 6005, 9010, ING01)

### SPECIFICATIONS

BALDABLOCK fences marked C€ are complete and ready to install. Our products show the features below: MATERIAL: except accessories and fasteners, that are usually made of stainless steel, the material used is hot-dipped galvanized steel S235JR UNI EN 10025:2005 according to UNI EN ISO 1461, possibly coated with thermosetting polyester powders in a standard color of the range RAL. FRAME: framed out of square and rectangular tubes in different sizes and thicknesses adapted to the size request; suitable for its excellent strength and durability. INFILL PANEL: manufactured in perfect harmony with the elements of the fence, if it exists. It can be an electro welded grating, a perforate plate, profiles of tube or other (among the available infill panels). SUPPORTS: it can be made of suitable tube columns or wall brackets, all made in steel with the same characteristics. LOCK SYSTEM: it can be manual or electrical. ACCESSORIES AND FASTENERS: as norm unified fasteners of steel and bolt are supplied.

**PLEASE NOTICE:** the product can be motorized or fitted for motorization. C€ Certification is valid just for manual lock system, if the end-user will install the motorization, the installer will provide C€ Certification for its automation system.

## GRIGLIATI BALDASSAR s.r.l.

via E. Maiorana, 13

31025 Santa Lucia di Piave (TV) - Italy

tel. (+39) 0438 450850 - fax (+39) 0438 450811

info@grigliatibaldassar.com - www.GrigliatiBaldassar.com

